



MPEG IMX Family



SONY

[www.sonybiz.net/imx](http://www.sonybiz.net/imx)



Product line-up	
MPEG IMX Technology	. . . . .03
Camcorder	
MSW-970P	. . . . .05
Camcorder Accessories	. . .06
Studio Recorders	
MSW-M2000P/1	. . . . .07
MSW-A2000P/1	. . . . .07
MSW-2000	. . . . .08
Studio Player	
MSW-M2100P/1	. . . . .08
Studio Recorder/Player Options	
e-VTR Option	. . . . .09
Compact Players	
J-30 & J-30/SDI	. . . . .10
Specifications	. . . . .11



MPEG IMX incorporates advanced production technology and is designed to fully meet recognised industry standards. Technologies are only incorporated where they provide demonstrable new benefits to the end user. Some of the technologies to be incorporated into the MPEG IMX system are explained here.

### Broadcast Quality Pictures with D-10 Operation

The Society of Motion Picture and Television Engineers (SMPTE) has issued two standards on which MPEG IMX is based. These standards, known as D-10, were issued to ensure seamless operation between products from multiple manufacturers.

The first D-10 standard, SMPTE 356M, describes an MPEG-2 4:2:2P@ML data stream employing Intra-frame (I-frame) compressed video encoding. SMPTE 356M provides for recording at 30, 40 and 50 Mb/s for the highest quality Standard Definition video performance and multi-generation editing.

The second SMPTE D-10 standard is SMPTE 365M. This describes all aspects of the physical recording within a tape-based recorder. It contains details of the recorded data tracks on tape and the dimensions of the cassette. MPEG IMX camcorders, studio recorders and players conform to the two D-10 standards.

### Eight Channels of Digital Audio

Selected devices within the MPEG IMX product line-up can record and play back eight channels of 48kHz digital audio at 16-bit resolution. MPEG IMX studio recorders and players can also be switched to four channel operation at 24-bit 48kHz via a user selectable set-up menu.

### Longest-Ever Recording Times

MPEG IMX provides the longest-ever long recording time on a 1/2-inch Betacam-family cassette. A maximum of 220 minutes can be stored on a large cassette and 71 minutes on a small cassette when recording in 625/50 mode.

### Lossless Transfer of MPEG-2 Data

The Serial Data Transport Interface – Content Package (SDTI-CP) is another SMPTE standard employed within MPEG IMX. SDTI-CP is an interface that transports the D-10 MPEG IMX data from one device to another. It transfers the data in its native D-10 form, guaranteeing a perfect data copy from one D-10 device to the next. MPEG IMX studio recorders use SDTI-CP to transfer video and audio from MPEG IMX cassettes at up to twice normal speed to D-10-compliant disk recorders and servers.

### Compatibility with Betacam, Betacam SP, Betacam SX and Digital Betacam

MPEG IMX maintains compatibility with current analogue and digital systems. This compatibility provides a logical, cost-effective migration path to a combined AV/IT operation.

### Metadata Enabled

Rapid access to content is critical when producing, repurposing and distributing content across multiple platforms. SMPTE has standardised the Unique Material Identifier (UMID) to radically improve the searching for and access to material. The UMID provides a unique label for each item of video and audio and can be tracked throughout the production chain. The UMID can link video and audio material on tape or disk to production notes, scripts and viewer information held within an external database. This fully integrates all aspects of content production.

## MPEG IMX Recording Format

GENERAL		VIDEO	
Tape width	12.65 mm (1/2-inch)	Compression	MPEG-2 4:2:2P@ML, Intra frame coding (ISO/IEC 13818-2000)
Tape material	Metal Particle tape	Video bit rate	50 Mb/s
Recording/	Max. 184 (525) / 220 (625)	Active lines per frame	512 (525)/608 (625)
Playback time	with L cassette	Sampling frequency	Y: 13.5 MHz, R-Y/B-Y: 6.75 MHz
Tape speed	64.467 (525) / 53.776 (625) mm/s	Quantization	8-bits/sample
Track pitch	21.7 µm	Error correction	Reed-Solomon
Tracks per frame	8 tracks/frame		
Longitudinal tracks	Time code/Control		
Playback compatibility		AUDIO	
MSW-M2000P/1 +	Betacam, Betacam SP, Betacam SX,	Compression	None
MSW-M2100P/1	Digital Betacam	Sampling frequency	48 kHz
MSW-A2000P/1	Betacam, Betacam SP, Betacam SX	Quantization	16 or 24-bits/sample (selectable)
MSW-2000	Betacam SX	Channels	8 or 4
		Data recording capability	Yes
		Error correction	Reed-Solomon

### File-Based Operation using MXF

There is a continuing shift from traditional step-by-step programme production to workgroup-based production across computer networks. The increased speed of networks and the availability of lower cost IT components continue to accelerate the rate of this change. But workgroup operation can only succeed when standardised formats exist for the file-based exchange of video and audio material. The Professional MPEG Forum recognised this need and worked to create MXF (the Material Exchange Format).

MXF is a file exchange mechanism for the movement of video, audio and metadata across a network. Standardised by SMPTE, MXF has been developed for storage on a variety of media and operates independently of any specific network or operating system. MXF is compression independent and can carry many different content types as its payload, including MPEG IMX, HDCAM, DVCAM, DVCPRO and uncompressed video.

MXF is an open, widely supported file format used in products such as the MPEG IMX-based e-VTR where traditional stream-based AV production can co-exist within file-based operations.

### Rapid Access to Recorded Material using the Tele-File System

Tele-File is a system for identifying the location of video and audio content on a cassette. The system is based upon the Tele-File cassette label. This label has a built-in memory chip and can be attached to any Betacam-family cassette. Information, such as the IN point, the OUT point and the NAME of a video clip, can be written to and read from a Tele-File label.

MPEG IMX studio recorders, players, camcorders and the revolutionary e-VTR have a Tele-File reader/writer built in to the cassette compartment. This allows a networked e-VTR to rapidly identify and cue up to video files recorded on the tape. With Tele-File, a controlling software application can look at the files in the same way as if it were looking at a list of files on a computer hard disk. This significantly reduces the time required to access material, leading to greater operation efficiency and improved workflow.

## MPEG IMX Advantages

- MPEG-2 4:2:2P@ML at 50 Mb/s
- Superb picture quality
- 608 (625/50) lines per frame
- 220 minutes recording with L-cassette
- 8 channels of digital audio
- Frame accurate digital editing
- Lower tape running costs
- Lower maintenance costs
- Powerful editing features including pre-read
- Fully networkable for IP operation
- Metadata-enabled
- Based on industry standards throughout
- Rugged and reliable

MSW-970P

MPEG IMX CAMCORDER



The MSW-970P combines Power HAD™ EX CCD performance with high precision 14-bit A/D conversion to deliver reduced noise and smear and excellent sensitivity. Progressive recording at 25 frames per second is provided along with features such as slow

shutter mode, interval recording and picture cache operation. Use of the latest technology has reduced size, power consumption and acoustic noise.

## MSW-970P FEATURES


- > 3-chip 2/3-inch Power HAD EX™ CCDs
- > Superb MPEG IMX picture quality
- > Switchable between 50i and 25P, and 4:3 and 16:9 modes
- > Long recording time of up to 71 minutes on a single cassette
- > 14-bit A/D conversion
- > High sensitivity of F11 at 2000 lux
- > Low smear level of -145dB (typical)
- > Excellent signal-to-noise ratio of 63dB
- > Turbo gain up to +48dB
- > TruEye™ processing for improved reproduction of natural colours
- > Slow shutter mode for shooting in extremely low-light conditions
- > Selectable gamma table including film-like gamma
- > Auto Trace White (ATW) system
- > Triple skin tone detail control
- > Multi-matrix feature
- > Dial in colour temperature
- > Dual optical filters
- > Picture cache for capturing the (up to) 8 seconds of material before the record button is pressed (MSDW-903 option required)
- > SDI output (CBK-SD01 option required)
- > Composite analogue input (MSDW-904 option required)
- > 4 channels of 16 or 20-bit digital audio\*
- > Stereo audio output
- > Slot for WRR-855 series wireless microphone receiver
- > Memory Stick slot for storage and recall of set-up parameters
- > Remote control using optional RM-B150 or RM-B750 controllers
- > Battery remaining display in viewfinder
- > Rugged and ergonomic design
- > Essence Mark recording for rapid cue up during editing
- > UMID (Unique Material Identifier) recording for picture cataloguing and searching

\* The MPEG IMX format supports audio recording of 8 channels at 16-bit resolution. The MSW-970P can record channels 1 to 4. An MPEG IMX studio VTR can be used to insert the additional channels 5 to 8.



 CBK-SD01 SDI Output Board	 MSDW-903 Picture Cache Board	 MSDW-904 Analogue Composite Input Board	 BKW-401 Viewfinder Rotation Bracket	 RM-B150 Remote Control Unit	 RM-B750 Remote Control Unit
 AC-DN10 AC Adapter	 AC-DN2B AC Adapter	 BP-GL65/GL95/ L60S/L80S Lithium Ion Battery Pack	 BC-L70 Battery Charger	 BC-L500 Battery Charger	 BC-M150 Battery Charger
 VCT-14 Tripod Adapter	 BCT-6MX/12MX/ 22MX/32MX/60MX/ 64MXL/94MXL/ 124MXL/184MXL HD12CL (cleaning tape) MPEG-IMX Tapes	 MSH-32/64/128 Memory Stick media	 WRR-855B Wireless Receiver (Shown here with a BTA-801 Camera adapter for rear Mounting to camcorder)	 WRR-862B Wireless Receiver	 WLL-CA50 Wireless Camera Transmitter
 WLL-RX55 Wireless Camera Receiver	 ECM-670/672/678 Shotgun-type Electret Condenser Microphones	 ECM-680S Shotgun-type Electret Condenser Microphones	<p>Not pictured here:</p> <ul style="list-style-type: none"> <li>1-547-341-12 Fog-proof Filter</li> <li>A-8262-537-A Viewfinder Eye-piece (high magnification)</li> <li>A-8262-538-A Viewfinder Eye-piece (low magnification)</li> <li>A-8267-737-A Viewfinder Eye-piece (standard magnification with special compensation for aberrations)</li> <li>A-8314-798-A Viewfinder Eye-Piece (high performance, x3)</li> <li>X-3608-271-1 Standard Viewfinder Lens</li> <li>A-8278-057-A Mounting Bracket for WRR-862B</li> <li>LC-DN7 Hard Carrying Case</li> </ul>		

## System Configuration

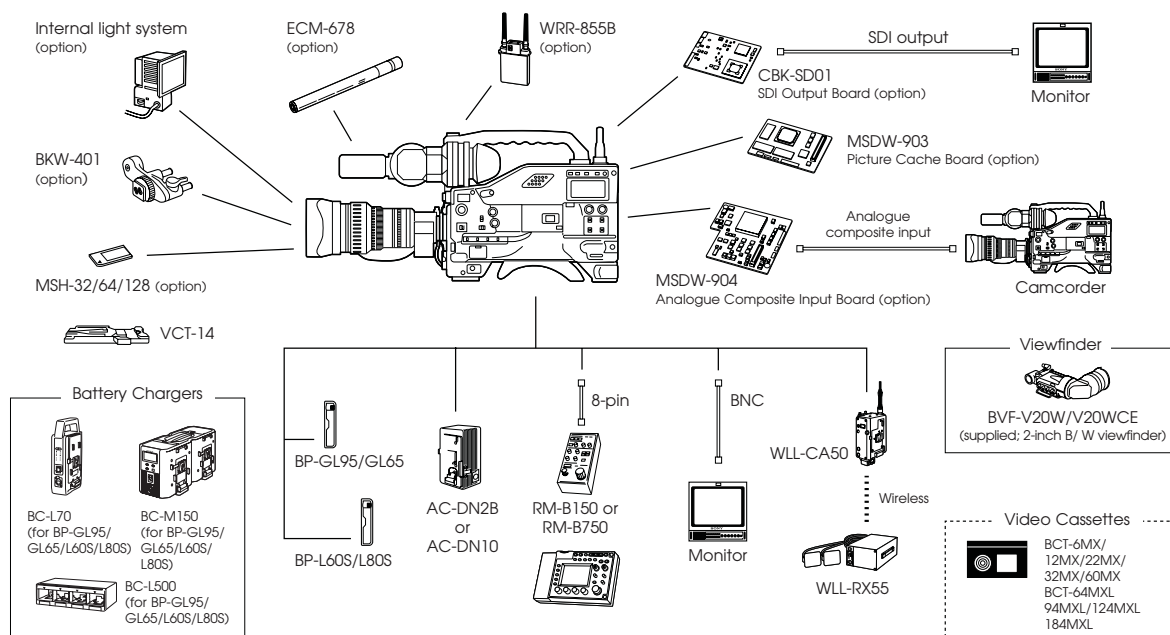

**MSW-M2000P/1**MPEG IMX DIGITAL  
VIDEOCASSETTE RECORDERRecords: **mPEG IMX**Replays: **BETACAM SX** **mPEG IMX** **Digital BETACAM**  
**BETACAM** **BETACAM SP**

The MSW-M2000P/1 MPEG IMX studio recorder combines the high picture quality of 50 Mb/s MPEG-2 intra-frame data compression with a rugged and reliable 1/2-inch tape transport. Designed for programmes such as drama, sports, arts, news and natural history, the MSW-M2000P/1 provides eight channels of uncompressed digital audio, making it ideal for multi-lingual and multi-channel operation. The MSW-M2000P/1 can be used for traditional linear editing or for broadcast playout. In addition to compatible replay of Betacam SX cassettes, the MSW-M2000P/1 can also replay Betacam, Betacam SP and Digital Betacam tapes, providing an elegant migration of existing systems to the open world of MPEG-2.

**MSW-M2000P/1 FEATURES**

- > 50 Mb/s MPEG-2 4:2:2P@ML for excellent picture quality
- > User selectable 48 kHz digital audio (8 channels 16-bit, or 4 channels 24-bit)
- > Long record and playback time: 220 minutes using an L cassette and 71 minutes using an S cassette
- > Betacam, Betacam SP, Betacam SX and Digital Betacam playback
- >  $\pm 0$  frame accurate insert/assemble editing
- > Pre-read editing capability
- > Broadcast quality variable speed playback at -1 to x3 speed (-1 to x2 with Betacam SX cassettes)
- > High-speed picture search at  $\pm 78$  times normal play speed with MPEG IMX cassettes
- > Video in/out via composite, component, SDI and SDTI-CP interfaces
- > Audio in/out via analogue, AES/EBU, SDI and SDTI-CP interfaces
- > 625/50 and 525/60 switchable operation
- > DMC (Dynamic Motion Control) function
- > Shot Mark handling
- > Double-speed transfer from MPEG IMX cassettes to D-10-compliant editors and servers via SDTI-CP, or the optional 1000Base-T interface
- > Memory Stick slot for storage of operational set-up menus and download of software
- > Upgradeable to e-VTR and MXF operation using optional BKMW-E3000
- > Tele-File function
- > UMID Metadata recording and playback

**MSW-A2000P/1**MPEG IMX DIGITAL  
VIDEOCASSETTE RECORDERRecords: **mPEG IMX**Replays: **BETACAM SX** **mPEG IMX**  
**BETACAM** **BETACAM SP**

The MSW-A2000P/1 MPEG IMX studio recorder provides all the features of the MSW-M2000P/1 but without Digital Betacam playback. Like the MSW-M2000P/1, the MSW-A2000P/1 can be equipped with e-VTR network functionality through the addition of the BKMW-E3000 Network Interface option. Operational set-up parameters can be permanently stored on Memory Stick via the Memory Stick port provided.

**MSW-A2000P/1 FEATURES**

- > 50 Mb/s MPEG-2 4:2:2P@ML for excellent picture quality
- > User selectable 48 kHz digital audio (8 channels 16-bit, or 4 channels 24-bit)
- > Long record and playback time: 220 minutes using an L cassette and 71 minutes using an S cassette
- > Betacam, Betacam SP and Betacam SX playback
- >  $\pm 0$  frame accurate insert/assemble editing
- > Pre-read editing capability
- > Broadcast quality variable speed playback at -1 to x3 speed (-1 to x2 with Betacam SX cassettes)
- > High-speed picture search at  $\pm 78$  times normal play speed with MPEG IMX cassettes
- > Video in/out via composite, component, SDI and SDTI-CP interfaces
- > Audio in/out via analogue, AES/EBU, SDI and SDTI-CP interfaces
- > 625/50 and 525/60 switchable operation
- > DMC (Dynamic Motion Control) function
- > Shot Mark handling
- > Double-speed transfer from MPEG IMX cassettes to D-10-compliant editors and servers via SDTI-CP, or the optional 1000Base-T interface
- > Memory Stick slot for storage of operational set-up menus and download of software
- > Upgradeable to e-VTR and MXF operation using optional BKMW-E3000
- > Tele-File function
- > UMID Metadata recording and playback

**MSW-2000**MPEG IMX DIGITAL  
VIDEOCASSETTE RECORDERRecords: **mPEG IMX**Replays: **BETACAM SX** **mPEG IMX****MSW-M2100P/1**MPEG IMX DIGITAL  
VIDEOCASSETTE PLAYERReplays: **BETACAM SX** **mPEG IMX** **Digital BETACAM**  
**BETACAM** **BETACAM SP**

For users who do not require playback of analogue Betacam, Betacam SP or Digital Betacam cassettes, Sony has introduced the MSW-2000. This 525/60 and 625/50 switchable recorder offers a lower-cost entry to the world of MPEG IMX recording and playback.

The MSW-M2100P/1 MPEG IMX studio player provides all the features of the MSW-M2000P/1 but in a player-only model. Broadcast-quality variable speed and picture search operation, along with 525/625 switchability and double-speed playback of MPEG IMX cassettes are all standard features.

## MSW-2000 FEATURES

- > 50 Mb/s MPEG-2 4:2:2P@ML for excellent picture quality
- > User-selectable 48 kHz digital audio (8 channels 16-bit, or 4 channels 24-bit)
- > Long record and playback time: 220 minutes using an L cassette and 71 minutes using an S cassette
- > Betacam SX playback
- >  $\pm 0$  frame accurate insert/assemble editing
- > Pre-read editing capability
- > Broadcast quality variable speed playback at -1 to x3 speed (-1 to x2 with Betacam SX cassettes)
- > High-speed picture search at  $\pm 78$  times normal play speed with MPEG IMX cassettes
- > Video in/out via composite, component, SDI and SDTI-CP interfaces
- > Audio in/out via analogue, AES/EBU, SDI and SDTI-CP interfaces
- > 625/50 and 525/60 switchable operation
- > DMC (Dynamic Motion Control) function
- > Shot Mark handling
- > Memory Stick slot for storage of operational set-up menus and download of software
- > Upgradeable to e-VTR and MXF operation using optional BKMW-E3000
- > Tele-File function
- > UMID Metadata recording and playback

## MSW-M2100P/1 FEATURES

- > 50 Mb/s MPEG-2 4:2:2P@ML playback for excellent picture quality
- > User selectable 48 kHz digital audio (8 channels 16-bit, or 4 channels 24-bit)
- > Long playback time: 220 minutes using an L cassette and 71 minutes using an S cassette
- > Betacam, Betacam SP, Betacam SX, MPEG IMX and Digital Betacam playback
- >  $\pm 0$  frame accurate operation
- > Broadcast quality variable speed playback at -1 to x3 speed (-1 to x2 with Betacam SX cassettes)
- > High-speed picture search at  $\pm 78$  times normal play speed with MPEG IMX cassettes
- > Video out via composite, component, SDI and SDTI-CP interfaces
- > Audio out via analogue, AES/EBU, SDI and SDTI-CP interfaces
- > 625/50 and 525/60 switchable operation
- > DMC (Dynamic Motion Control) function
- > Shot Mark handling
- > Double-speed transfer from MPEG IMX cassettes to D-10-compliant editors and servers via SDTI-CP, or the optional 1000Base-T interface
- > Memory Stick slot for storage of operational set-up menus and download of software
- > Upgradeable to e-VTR and MXF operation using optional BKMW-E3000
- > Tele-File function
- > UMID Metadata playback




## Options

### BKMW-E3000

#### e-VTR NETWORK INTERFACE OPTION

MPEG IMX studio recorders and players can now be equipped with e-VTR functionality. The optional plug-in Network Interface provides an elegant integration of tape and file-based operation for combined AV/IT production. The BKMW-E3000 adds network connectivity, an IP address and the ability to exchange video, audio and metadata within MXF files. Furthermore, an e-VTR can create MXF files from all Betacam, Betacam SP, Betacam SX, MPEG IMX and Digital Betacam tapes supplied by Sony since 1982. These files can be moved around a Local Area Network (LAN) using simple drag and drop operation. With the BKMW-E3000, MPEG IMX VTRs can be integrated into a standard 1000Base-T environment at the user's own pace, bringing new benefits to workflow through the combination of computer-based and tape-based operations.

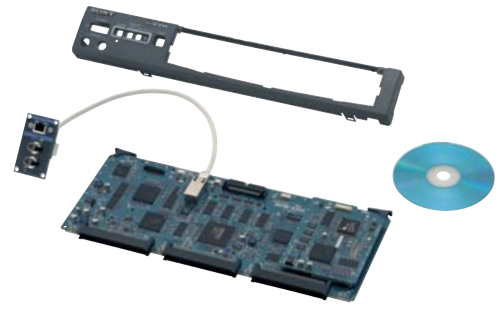

## BKMW-E3000 FEATURES

- > Adds IEEE 802.3ab 1000Base-T interface and IP address to MPEG IMX VTRs
- > MXF file transfer with MPEG IMX D-10 data payload
- > Reliable file transfer using TCP/IP and FTP
- > SNMP-enabled for remote monitoring
- > Low resolution capability for material selection prior to file transfer using same browser format as XDCAM
- > MXF output from Betacam, Betacam SP, Betacam SX, MPEG IMX and Digital Betacam cassettes from MSW-M2000P/1 and MSW-M2100P/1
- > e-Manager software application allows simple MXF file creation and movement

### BKMW-101

#### STUDIO VTR CONTROL PANEL



### BKMW-102

#### CONTROL PANEL CASE



### BKMW-103

#### CONTROL PANEL EXTENSION KIT



The BKMW-101 provides additional control of the MPEG IMX studio recorders and players from a remote location. It is used with the BKMW-102 Control Panel Case and the BKMW-103 Control Panel Extension kit. A switch on the front of the recorder/player allows control to be selected between the remote control panel and the control panel supplied with the recorder/player. The BKMW-102 and BKMW-103 can also be used to extend the supplied front panel of the recorder or player. BKMW-103 includes a blanking panel which can be fixed to the front of the recorder/player in place of the original control panel.

### BKMW-104

#### HD UP CONVERTER BOARD



The BKMW-104 can be installed into MPEG IMX VTRs to provide a High Definition output via HD-SDI.

The BKMW-104 converts 625/50 material to 1080/50i, and converts 525/60 material to 1080/59.94i. Please note that the BKMW-104 cannot be installed to a VTR which has the BKMW-E3000 e-VTR Network Interface Option fitted and vice versa.




### MLB-1M-100

#### TELE-FILE LABELS (Packs of 100) Cassette not included



### RMM-131

#### RACK MOUNT KIT



BCT-6MX (7) / 12MX (14) / 22MX (26) / 32MX (38) / 60MX (71) (SMALL) \*  
BCT-64MXL (76) / 94MXL (112) / 124MXL (148) / 184MXL (220) (LARGE) \*  
BCT-HD12CL (cleaning tape)

#### MPEG IMX TAPES

\* record duration shown in brackets



## Services from Sony

### Services from Sony: working with you, working for you.

Recognising that every company and every challenge is unique, we offer a complete and comprehensive range of services all the way through consulting, planning, financing, implementation, training, servicing, maintenance and support. Choose exactly what's right for you, when and where you need it.

**Sony Professional Services:** Tailor-made design, installation and project management of audio-visual and IT (AV/IT) systems using skills developed over 25 years of systems integration.

**Sony Financial Services:** Innovative and flexible finance solutions designed to meet budgetary and financial requirements and constraints, enabling businesses to always have the most current technology.

**Sony Training Services:** A range of off-the-shelf or customised training services from basic operation through to high-level technical maintenance.

**Sony Support Services:** Fully integrated and customised support for products and systems throughout their operational life, combining proactive and reactive technical services

Not all services are available in all countries. If you'd like to find out more about what we do, who we do it for and how we do it, visit [www.sonybiz.net](http://www.sonybiz.net) or contact your local Sony office.

**J-30 & J-30/SDI**

## COMPACT PLAYERS



Plays:



The J-30 and J-30/SDI are the smallest players of Betacam family cassettes. The design concept of the J-Series was for affordable, compact office viewers to be used by producers, journalists and production staff. The J-30 and J-30/SDI can replay Betacam, Betacam SP, Betacam SX, MPEG IMX and Digital Betacam S-cassettes and L-cassettes. They also have all the features required for viewing and logging, and – although not designed for linear editing applications or on-air use – are ideal for source feeding to servers or non-linear editing systems.

The J-30 provides composite and component analogue video outputs, while the J-30/SDI has composite analogue and SDI outputs. Both models have an i.LINK interface for feeding material to DV-based editing applications and are supplied with an infra-red remote controller. The J-30 and J-30/SDI also have a jog/shuttle dial, 525/625 versatility, simple remote control via RS-422A and audio meters – all packed into their compact size.

**J-30 & J-30/SDI FEATURES**

- > Extremely compact: 307 x 100 x 397 mm (12 1/8 x 4 x 15 1/2 inches) in size and just 8 kg in weight
- > i.LINK interface (25 Mb/s DV output, and remote control input via 6-pin IEEE-1394)
- > Playback of Betacam, Betacam SP, Betacam SX, MPEG IMX and Digital Betacam cassettes
- > Playback of S-cassettes and L-cassettes
- > Jog/Shuttle dial with x20 maximum search speed or Digital Betacam cassettes
- > Infra-red remote controller
- > 525/625 switchable for international operation
- > Monitor output of 2 audio channels (selectable on front panel)
- > Audio meters for display of the selected 2 channels of audio
- > Industry-standard RS-422A control interface for remote feeding into servers and non-linear editors

**J-30 only**

- > Composite analogue and component analogue video outputs

**J-30/SDI only**

- > Composite analogue and 2 SDI outputs (one with superimposed characters)
- > Timecode output via BNC connector
- > Built-in UMID (Unique Material Identifier) reader
- > 4 channels of digital output via SDI (8 channels when replaying MPEG IMX cassettes)

## MSW-970P



GENERAL	
Mass	Approx. 3.7 kg (8 lb 3 oz) 5.4 kg (with VF, Mic, BCT-60MX, BP-GL95) (11 lb 14 oz)
Power requirements	DC 12 V +5.0 V/-1.0 V
Power consumption	Approx. 27 W (with DC 12V power supply, REC mode with VF)
Operating temperature	0 to 40 °C (+32 °F to +104 °F)
Storage temperature	-20 to +60 °C (-4 °F to +140 °F)
Humidity	25 to 85% (relative humidity)
Continuous operating time	Approx. 180 min with BP-GL95 battery at 25°C (77°F), REC mode
SIGNAL INPUTS	
Genlock video	BNC type x1, 1.0 Vp-p, 75 Ω
Time code input	BNC type x1, 0.5 to 18 Vp-p, 10 kΩ
Video outputs SDI	BNC type x1, 0.8 Vp-p, 75 Ω (with the CBK-SD01)
Audio input (CH-1/2)	XLR-3-31 type x2, -60/-50/+4 dBu selectable, high impedance, balanced (0 dBu = 0.775 Vrms)
Mic input	XLR-3-31 type x1, -60/-50 dBu
SIGNAL OUTPUTS	
Video output (Analogue composite)	BNC type x1, 1.0 Vp-p, 75 Ω
Video test output	BNC type x1, 1.0 Vp-p, 75 Ω
Time code output	BNC type x1, 1.0 Vp-p, 75 Ω
Earphone	Minijack x2
Audio output (CH-1/CH-2)	XLR-5-pin male (stereo)
OTHERS	
Lens	12-pin
VF	20-pin
Remote	8-pin
Light	2-pin, DC 12 V, max. 50 W
DC input	XLR-4-pin (male, DC 11 to 17 V)
DC output	4-pin (for wireless microphone receiver), DC 12 V (max. 0.1 A)
Battery terminal	5-pin
Wireless receiver input	D-Sub 15-pin
VTR SECTION	
Recording format	Video MPEG IMX (50/40/30 Mb/s) Audio 4 ch/16 bits/48 kHz, 4 ch/20 bits/48 kHz
Tape speed	53.776 mm/s
Playback/Recording time	Max. 71 min. with BCT-60MX cassette
Fast forward time	Approx. 5 min. with BCT-60MX
Rewind time	Approx. 5 min. with BCT-60MX
Recommended tape	Sony MPEG IMX S cassette (BCT-6MX/12MX/22MX/32MX/60MX)
DIGITAL VIDEO PERFORMANCE	
Sampling frequency	Y: 13.5 MHz, R-Y/B-Y: 6.75 MHz
Quantization	8 bits/sample
K-factor (2T pulse)	Less than 1%
Y/R-Y/B-Y delay	Less than 15 ns
DIGITAL AUDIO PERFORMANCE*	
Sampling frequency	48 kHz (synchronised with video)
Quantization	20/16bits/ sample (selectable)
Frequency response	20 Hz to 20 kHz, +0.5 dB/-1.0 dB
Dynamic range	More than 85 dB (emphasis ON)
Distortion (at 1 kHz, emphasis ON, reference level)	Less than 0.08%
Cross talk (at 1 kHz, reference level)	Less than -70 dB
Wow & flutter	Below measurable limit
Head room	20 dB (ex-factory setting)
* The specifications given above were measured via CA-701/702 Camcorder Adapter or MSDW-902 SDI output board.	
CAMERA SECTION	
Pickup device	3-chip 2/3-inch type Power HAD EX CCD
Aspect ratio	16:9/4:3 switchable
Total picture elements	1038 (H) x 1188 (V)
Optical system	F1.4 prism (with quartz filter)
Built-in optical filters	1: Clear, 2: 1/4ND, 3: 1/16ND, 4: 1/64ND, A: CROSS, B: 3200K, C: 4300K, D: 6300K
Lens mount	2/3 inch type Sony bayonet mount
Scan format	625/50i, 625/25p
Sensitivity (2000 lx, 89.9% reflectance)	F11 (typical) (2000 lx, 89.9% reflectance)
Minimum illumination	0.008 lx (F1.4 lens, +48 dB gain, with slow shutter mode at 16-frame accumulation)
Smear level	-145 dB (typical)
Video S/N ratio	63 dB (typical)
Vertical resolution	480 TV lines (with EVS) and 530 TV lines (without EVS) at 625/50i mode 575 TV lines at 625/25p mode
Shutter speed	1/60, 1/125, 1/250, 1/500, 1/1000, 1/2000 s at 625/50i mode 1/33, 1/50, 1/100, 1/125, 1/250, 1/500, 1/1000, 1/2000 s at 625/25p mode
ECS	50 to 6000 Hz at 625/50i mode, 25 to 6000 Hz at 625/25p mode
Slow shutter	1/25, 1/12.5, 1/8.3, 1/6.3, 1/5, 1/4.2, 1/3.6, 1/3.1, 1/1.6 s (1 to 8, 16 frames)
Gain selection	-3, 0, 3, 6, 9, 12, 18, 24, 30, 36, 42, 48 dB (for GAIN LOW, GAIN MID, GAIN HIGH and GAIN TURBO positions)
Registration	0.05% (all zones without lens)
Warm-up time	2 s
Modulation depth at 5MHz	70% (16:9, typical) / 55% (4:3, typical)
VIEWFINDER	
CRT	2.0-inch type monochrome
Controls	BRIGHT, CONTRAST, PEAKING controls, TALLY, ZEBRA, DISPLAY switches
Horizontal resolution	450 TV lines (16:9)
Microphone	Electret condenser microphone (Ultra-directional) (Detachable)
SUPPLIED ACCESSORIES	
	Operation manual (x1), Viewfinder (x1), Lens cap (x1), Shoulder belt (x1), Monoaural microphone (x1), XLR connector cap (x4)



MSW-M2000P/1



MSW-M2100P/1



MSW-A2000P/1



MSW-2000

GENERAL	
Power requirements	AC 100 to 240 V, 50/60 Hz
Power consumption	2.1A (210 W) / AC 240 V 1.9A (190 W) / AC 240 V 2A (200 W) / AC 240 V 1.8A (180 W) / AC 240 V
Operating temperature	+5 to +40 °C (+41 to +104 °F)
Storage temperature	-20 to +60 °C (-4 to +140 °F)
Humidity	20 % to 90 % (relative humidity)
Mass	23.5 kg (51 lb 12 oz) 23.0 kg (50 lb 11 oz) 22.0 kg (48 lb 8 oz)
Dimensions (W x H x D)	427 x 194 x 544 mm (16 7/8 x 7 3/4 x 21 1/2 inches)
Tape speed	
Digital Betacam	96.7 (525 and 625) mm/s
MPEG IMX™	64.467 (525)/53.776 (625) mm/s
Betacam SX	59.515 (525)/59.575 (625) mm/s
Betacam/Betacam SP	118.6 (525)/101.51 (625) mm/s
Digital playback time	
Digital Betacam	Max. 124 (525 and 625) min with BCT-D124L cassette
MPEG IMX™	Max. 184 (525)/220 (625) min with BCT-184MXL cassette
Betacam SX	Max. 194 (525 and 625) min with BCT-194SXL
Betacam/Betacam SP	Max. 90 (525)/108 (625) min with BCT-90MLA
Fast forward/rewind time	Approx. 3 min with BCT-184MXL cassette
Search speed range	
Digital Betacam	±50 times normal playback speed
MPEG IMX™	±78 times normal playback speed
Betacam SX	±78 times normal playback speed
Betacam/Betacam SP	±35 (525)/±42 (625) times normal playback speed
Servo lock time	0.5 (NTSC)/0.7 (PAL) s or less (from standby on)
Load/unload time	6 s or less

INPUTS/OUTPUTS	
Analogue composite input	BNC (x 2 including one throughout), 1.0 Vp-p, 75 Ω, sync negative
Analogue composite output	BNC (x 3), 1.0 Vp-p, 75 Ω, sync negative
Analogue component input	BNC (x 3), 1.0 Vp-p, 75 Ω, sync negative, R-Y/B-Y: 0.7 Vp-p, 75 Ω
Analogue component output	BNC (x 3), 1.0 Vp-p, 75 Ω, sync negative, R-Y/B-Y: 0.7 Vp-p, 75 Ω
SDI input	BNC (x 2 including one active throughout), SMPTE 259M (ITU-R BT.656-3), 270 Mbit/s
SDI output	BNC (x 3, including one character out), SMPTE 259M (ITU-R BT.656-3), 270 Mbit/s
SDTI-CP input	BNC (x1), SMPTE, 326M (SDTI-CP)
SDTI-CP output	BNC (x2), SMPTE, 326M (SDTI-CP)
Analogue audio input	XLR (x4)
Analogue audio output	XLR (x4)
Digital audio input (CH 1/2, 3/4, 5/6, 7/8), AES/EBU	BNC (x4), default 48 kHz (32 to 48 kHz with Sample rate converter)
Digital audio output (CH 1/2, 3/4, 5/6, 7/8), AES/EBU	BNC (x4), 48 kHz fixed
Remote control	
Remote RS-422A	D-sub 9-pin (x2), Sony 9-pin remote interface
RS-232C (ISR*)	D-sub 9-pin (x1), RS-232C interface
Parallel remote	D-sub 50-pin (x1), female
Video control (1)	D-sub 15-pin (x1), female
Control panel	Circular connector 10-pin, female
Reference input	BNC (x2) (VBS or VS) (including one through out)
Time code input	XLR (x1), female
Time code output	XLR (x1), male
Memory card insertion slot	PCMCIA (x1)
Memory Stick insertion slot	Memory Stick (x1)
Monitor output L/R	XLR (x2) (channel selectable)

\* ISR: Interactive Status Reporting

## e-VTR (BKMW-E3000)



GENERAL	
Power requirements	+2.5 V DC: 3.0 A, +3.4 V DC: 3.3 A, +6.0 V DC: 1.0 A (Supplied from MSW-2000P Series VTR)
Operating temperature	+5 to +40 °C (+41 to +104 °F)
Storage temperature	-20 to +60 °C (-4 to +140 °F)
Operating humidity	25 to 80 % (no condensation)
Dimensions Board (W x H)	355 x 146 mm (14 3/8 x 5 3/4 inches)
Front Panel (W x H x D)	430 x 70 x 45 mm (17 3/8 x 2 7/8 x 1 3/4 inches)
Connector Panel (W x H)	72 x 42 mm (2 7/8 x 1 3/4 inches)
Mass Board	Approx. 380 g (13.4 oz)
Front Panel	Approx. 130 g (4.6 oz)
Connector Panel	Approx. 50 g (1.8 oz)
Interface	Network Interface, RJ-45, Gigabit Ethernet (1000Base-T)
SYSTEM REQUIREMENTS FOR THE SUPPLIED e-VTR APPLICATION SOFTWARE	
PC	IBM PC/AT® -Compatible machine
Operating System	Microsoft Windows 2000, XP (with DirectX 8.1b or higher)
Memory Capacity	256 MB RAM minimum
CPU	1-GHz Intel® Pentium® processor or faster
Display	XGA 1024 x 768 or higher with more than 16-bit High Colour
Sound	MCI Device & Driver, Microphone, Speaker
Interface	Fast Ethernet or GbE is recommended
Hard Disk Drive	5 MB or more

Notes: The BKMW-E3000 can be installed into any MPEG IMX VTR that supports the Tele-File™ function.



MSW-M2000P/1



MSW-M2100P/1



MSW-A2000P/1



MSW-2000



J-30 &amp; J-30/SDI

## PROCESSOR ADJUSTMENT RANGE

Video level	±3 dB/ - ∞ to +3 dB selectable
Chroma level	±3 dB/ - ∞ to +3 dB selectable
Black level	±210 mV
Chroma phase	±30°
System sync phase	±15 µs
System SC phase	±200 ns
Y/C delay	±100 ns (Betacam/Betacam SP playback only)
Composite input level	±3 dB

## DIGITAL VIDEO PERFORMANCE

Sampling frequency	Y: 13.5 MHz R-Y/B-Y: 6.75 MHz
Quantization	8 bits/sample
Error correction	Reed-Solomon code
Analogue component output	Bandwidth: Y: 0 to 5.75 MHz +0.5/-2.0 dB, R-Y/B-Y: 0 to 2.75 MHz +0.5/-2.0 dB S/N ratio: 56 dB or more K-factor (2T pulse): 1 % or less
Analogue component input to Analogue component output	A/D and D/A quantization: 10 bits/sample Bandwidth: Y: 0 to 5.75 MHz +0.5/-2.0 dB, R-Y/B-Y: 0 to 2.75 MHz +0.5/-2.0 dB S/N ratio: 52 dB or more K-factor (2T pulse): 1 % or less LF non-linearity: 3.0 % or less
Analogue composite input to Analogue composite output	Bandwidth: 0 to 5.75 MHz +0.5/-2.0 dB S/N ratio: 53 dB or more Differential gain: 2 % or less Differential phase: 2° or less Y/C delay: 20 ns or less K-factor (2T pulse): 1 % or less

## DIGITAL AUDIO PERFORMANCE

Sampling frequency	48 kHz (synchronised with video)
Quantization	16 or 24 bits/sample (selectable)
Analogue input to output A/D and D/A quantization	24 bits/sample
Frequency response (0 dB at 1 kHz)	20 Hz to 20 kHz +0.5 dB/-1.0 dB
Dynamic range (at 1 kHz, emphasis ON)	More than 90 dB (16 bits)/ 95dB (24 bits)
Distortion (at 1 kHz, emphasis ON, reference level)	Less than 0.05%
Cross talk (at 1 kHz, between any two channels)	Less than -80 dB
Wow & flutter	Below measurable level
Head room	20 dB (18 dB selectable)
Emphasis (ON/OFF selectable in, REC mode)	T1=50 µs, T2=15 µs

## SUPPLIED ACCESSORIES

	PSW 4 x 16 Rack mount screws x 4, Operation manual x 1, Installation manual x 1
--	---

## GENERAL

Power requirements	AC 100 V to 240 V, 50/60 Hz
Power consumption	55 W
Operating temperature	+5 to +40 °C (+41 to +104 °F)
Storage temperature	-20 to +60 °C (-4 to +140 °F)
Humidity	25% to 80% (relative humidity)
Mass	8.2 kg ( 18 lb 1 oz)
Dimensions (W x H x D)	307 x 100 x 397 mm (12 1/8 x 4 x 15 3/4 inches)
Tape Speed	
Digital Betacam	96.7 mm/s
MPEG IMX	64.467 mm/s (525 mode), 53.776 mm/s (625 mode)
Betacam SX	59.515 mm/s (525 mode), 59.575 mm/s (625 mode)
Betacam/Betacam SP	118.6 mm/s (525 mode), 101.5 mm/s (625 mode)
Playback Time	
Digital Betacam	Max. 124 min. with BCT-D124L
MPEG IMX	Max. 184 min. (525 mode)/ 220 min. (625 mode) with BCT-184MXL
Betacam SX	Max. 194 min. with BCT-194SXL
Betacam/Betacam SP	Max. 90 min. (525 mode)/ 108 min. (625 mode) with BCT-90MLA
Fast Forward / Rewind	
Digital Betacam	Approx. 5 min. with BCT-D124L
MPEG IMX	Approx. 5 min. with BCT-184MXL
Betacam SX	Approx. 5 min. with BCT-194SXL
Betacam/Betacam SP	Approx. 5 min. with BCT-90MLA
Search Speed Range	
Digital Betacam	±20 times normal playback speed
MPEG IMX	±32 times normal playback speed
Betacam SX	±35 times normal playback speed
Betacam/Betacam SP	±18 times (525 mode), ±20 times (625 mode) normal playback speed
Servo lock time	1.5 s or less (from standby on)
Load/unload time	9 s or less

## INPUT SIGNALS

Ext. sync	BNC (x1), Frame lock
-----------	----------------------

## OUTPUT SIGNALS

Analogue composite output	BNC (x1), RCA Phono (x1), 1.0 Vp-p, 75 Ω
S-video output	Mini DIN 4-pin (x1), Y: 1.0 Vp-p, C: 0.286 Vp-p burst, 75 Ω
Analogue component	BNC (x3), Y: 1.0 Vp-p, R-Y/B-Y: 0.7 Vp-p, 75 Ω output (with J-30)
SDI output (with J-30/SDI)	BNC (x2), SMPTE 259M, 270 Mb/s, 0.8 Vp-p, 75 Ω
i.LINK(DV) output	6-pin (x1), IEEE 1394 (with J-30) 6-pin (x1), IEEE 1394 (with J-30/SDI)
Time Code output (with J-30/SDI)	BNC (x1), 1.0Vp-p, 75 Ω unbalanced
Monitor output L/R	RCA Phono (x 2): -10 dBu at 47 KΩ load, unbalanced, XLR (male x 2): +4 dBm, 600 load, low impedance, balanced
Headphone output	JM-60 Stereo Phone Jack, -∞ to -12 dBu at 8 Ω load, unbalanced

## REMOTE CONTROL

RS-422A	D-sub 9-pin (female) (x1), Sony 9-pin remote interface
RS-232C	D-sub 9-pin (male) (x1)
Wireless	SIRCS

## SUPPLIED ACCESSORIES

	Operation manual (CD-ROM), Operation manual, vertical stand (x 2), Infra-red remote controller
--	--

## RECOMMENDED WIRELESS SYSTEMS: WL-800 SERIES



WRR-862B Receiver



WRR-855B Receiver



WRT-8B Transmitter\*



ECM-88BC Lavalier Mic

UHF operating frequency	Dependent on version / region	Dependent on version / region	Dependent on version / region	no
Frequency response	40 Hz - 18 kHz	100 Hz - 15 kHz	40Hz - 20 kHz	40Hz - 20 kHz
Signal to noise	>60 dB A-weighted	>60 dB A-weighted	60 dB or more	
RF Power output	N/A		10/50 mW Switchable	
Current consumption	230 mA	200 mA	6 hours @ 50 mW	
Battery life	5 hours		13 hours @ 10 mW	
Max SPL	N/A			120 dB
Weight	400 g	280 g	140 g incl batteries	1.5 g Capsule
Dimensions W x H x D (mm)	89 x 120 x 29.5	88 x 118 x 31	63 x 83 x 17	3.5 x 3.5 x 12.5 Capsule
Mounting/adaptor brackets required	A8278-057A	CA-WR855, BTA-801 or A8278-057A		
Cable Length	N/A			2.5 m

\* Or use WRT-847B Handheld Transmitter with either CU-F780, CU-G780, CU-E700, CU-E672 or CU-F117 Capsule

# SONY

**Specialist**

**Dealer**

Sony Specialist Dealers receive extensive training on all our products and services. They combine this with an in-depth knowledge of the market, ensuring you get advice that meets your needs before and after purchase. To find your nearest Sony Specialist Dealer visit our "dealer locator" at:

**[www.sonybiz.net/dealer](http://www.sonybiz.net/dealer)**

Sony, Betacam, Betacam SP, Betacam SX, Digital Betacam, MPEG IMX, Memory Stick, PowerHAD, XDCAM, XPRi and Tele-File are registered trademarks of the Sony Corporation, Japan. DVCPRO is a registered trademark of Matsushita Electric Industrial co., Ltd. All other trademarks are the property of their respective owners. Features and specifications are subject to change without notice. CA MPEG IMX FAMILY/GB- / /2007

# SONY

[www.sonybiz.net/imx](http://www.sonybiz.net/imx)